

Temperature Sensors



DP CONTROLS

DPCONTROLS SDNBHD

NO.42,JALANK UC HAIMAJ U11,KUC HAIEN TR EPRENEU RPARK,
JALANKUCHAILAM A,58200 KUALA LUMPU R.

Tel:+6037980 0 808 | Fax:+ 6037 9 8002 0 2

<http://www.dpcontrols.com.my>

E-mail:info@dpcontrols.com.my



Temperature Probes

Hand-Held Thermocouples


HHT




General Specifications:

- Various models - Surface, Spear and Immersion.
- Type 'K' thermocouple calibration.
- Fitted with a 2-pin miniature plug for connection to hand-held digital thermometers, loggers, etc

HHT-01 Industrial Thermocouple

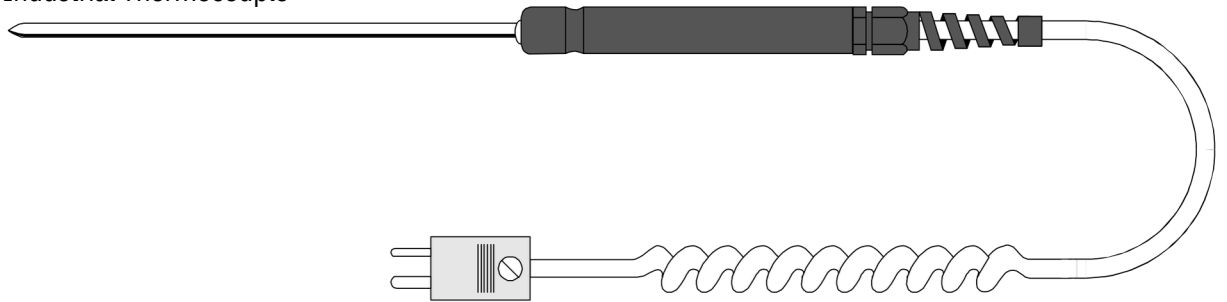

HHT-02 Insertion Thermocouple

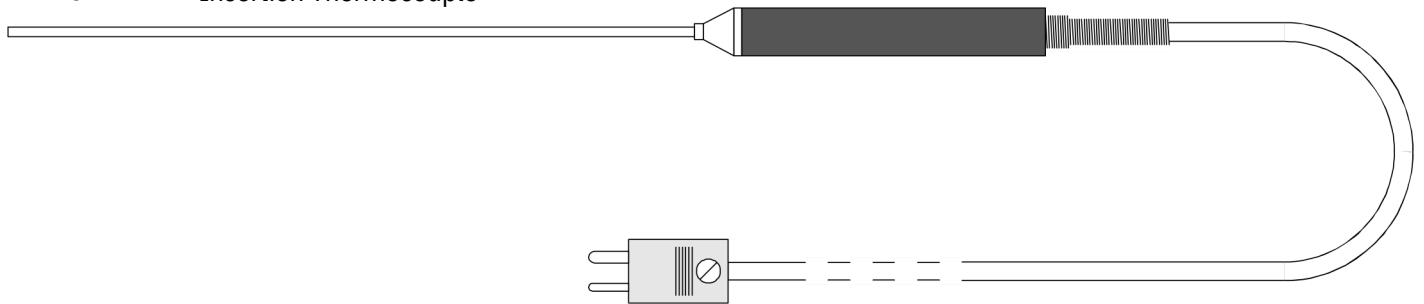

HHT-03 Mini Spear Thermocouple



HHT-04 Fast Response Surface Thermocouple





Item	Code	Thermocouple Type K	Tip Diameter mm	Sheath Outer Diameter mm	Sheath Length mm	Lead Length mm	Minimum Temp °C -30	Maximum Temp °C 400
Industrial	HHT-01	K	N/A	4.7	100	900	-30	600
Insertion	HHT-02	K	N/A	3.2	200	900	-30	300
Mini-Spear	HHT-03	K	N/A	3.2	100	900	0	400
Fast-Response Surface	HHT-04		14.5	N/A	N/A	900		

Note: The above covers the more common Hand-Held Thermocouple probes. We can supply probes to your particular specification.