

Temperature Sensors



DP CONTROLS

DPCONTROLS SDNBHD

NO.42,JALANK UC HAIMAJ U11,KUC HAIEN TR EPRENEU RPARK,
JALANKUCHAILAM A,58200 KUALA LUMPU R.

Tel:+6037980 0 808| Fax:+ 6037 9 8002 0 2

<http://www.dpcontrols.com.my>

E-mail:info@dpcontrols.com.my




Universal Thermocouple




General Specifications:

- K and J calibration
- Maximum temperature rating 350°C
- Various lead length
- Fibreglass insulated lead with stainless steel overbraid (SSOB)
- Various Thermocouple transmitters are also available to suit your particular application

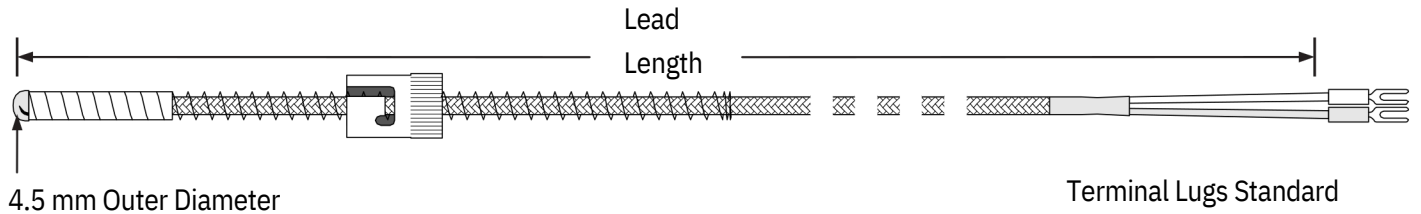


Item	Code		Specification
Model	UT-		
Calibration	K		Thermocouple
	J		Thermocouple
Lead Length	2.0-		Metres
	3.5-		Metres
	6.5-		Metres
Accessories	N		None
	A		Bayonet Adaptor
	P		Plug

Note: The above covers the more common Thermocouple probes. We can supply probes to your particular specification.

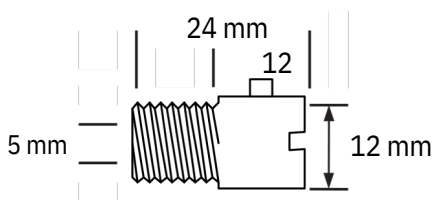

Bayonet Adaptor, Single Pin
1/8" BSP Tapered Thread



Plug: Standard
Round Pin

Part Number: IN-UTA